

## NE070DC29A 48V<sub>DC</sub> 29V<sub>DC</sub> Converter



The OmniOn Power™ NE070DC29A 48V<sub>DC</sub> to 29V<sub>DC</sub> Converter is designed to efficiently provide 29 Volt DC power needed for existing wireless base station equipment. This means that new 48V DC power and batteries supporting modern 48V LTE deployments can also support legacy systems – without having to add an additional battery string.

Available in 1U shelves for mounting in 19 and 23 inch rack rails, the NE070DC29A can be used to make 29 Volts DC from any 48 Volt DC source.

Or if the existing battery system is supported by an Infinity M plant, 48 to 29 V converters can be added with no need for additional shelf hardware.

The NE070DC29A offers a powerful combination of efficiency, network simplicity and reliability for customers who have 48 Volts DC and need 29 Volts DC.

### Solar Applications

The NE070DC29A 48 to 29V converter compliments our ECO Priority rectifiers for use in off grid solar applications where the served equipment may be a collection of equipment, some of which requires 48 Volts DC and some of which requires 29 Volts DC.

### A True System Solution

NE070DC29A converters and ECO Priority Rectifiers are part of the proven Infinity Power System specifically designed for wireless sites.

- Monitoring / control – the built in microprocessor controls and monitors all critical converter functions and communicates with the system controller using the built in Galaxy Protocol serial interface.
- Dual Voltage Compatible - unique connector pin designation allows the 48 to 29 Volt converter to be used in a “Universal” power shelf, alongside ECO Rectifiers supporting loads and batteries at 48 Volts DC.
- Plug and Play – installation of the converter in a shelf connected to a compatible system controller initializes all set up parameters automatically. No adjustments are needed.

### Features and Advantages

- Compact – 1RU form factor provides high power density.
- Efficient – Peak efficiency of 94% occurs at less than 50% load matching sweet spots with customer use patterns.
- Flexibly provides 70 Amps of 29 Volt power from any 48 Volt DC source.
- Starts and runs at any DC voltage from 40 to 60V<sub>DC</sub>.
- Operates over a broad temperature range (-40°C through +75°C).
- Fail safe performance – hot insertion capabilities allow for converter replacement without system shutdown; inrush current protection prevents nuisance tripping of upstream breakers; coordinated start up assures that even large loads start.
- Extended service life – parallel operation with automatic load sharing ensures that units are not unduly stressed.

# NE070DC29A Technical Specifications

## Electrical Specifications

| INPUT  |   |     |     |     |          |
|--|---|-----|-----|-----|----------|
| Parameter  | Symbol  | Min | Typ | Max | Unit     |
| Operating Voltage                                | $V_{IN}$  | 40  |     | 60  | $V_{DC}$ |
| Absolute Limits                                  |   | 0   |     | 60  | $V_{DC}$ |
| Minimum Turn on Voltage                          | $V_{IN}$  | 40  |     |     | $V_{DC}$ |
| Nominal DC input current @ 54.5V                 |   |     | 42  |     | A        |
| Max DC input current @ 40V in and 70 amps output | $I_{IN}$  |     | 60  |     | A        |
| Inrush Current @ 60V input                       | $I_{IN}$  |     | <65 |     | A        |
| Holdover   | >1 milliseconds, with Output droop from 29V to 23 V |     |     |     |          |

| OUTPUT                                    |  |     |            |     |                          |
|---|--|-----|------------|-----|--------------------------|
| Parameter                                 | Symbol   | Min | Typ        | Max | Unit                     |
| Output Voltage Setpoint                   | $V_{OUT}$  |     | 27.25      |     | $V_{DC}$                 |
| Output Voltage Range                      | $V_{OUT}$  | 23  |            | 29  | $V_{DC}$                 |
| Output Current                            | $I_{OUT}$  |     | 70         |     | A                        |
| Voltage Regulation                        | $V_{OUT}$  |     | $\pm 0.5$  |     | % w/<br>controller       |
| Current Limit Setpoint (Full load)        |  | 30  |            | 100 | %                        |
| Power Limit                               | W  |     | 2080       |     | Watts                    |
| Monotonic Start-up (Compare to overshoot) |  |     | <1.5       |     | %                        |
| Ripple                                    | $V_{OUT}$  |     | 100<br>250 |     | $mV_{RMS}$<br>$mV_{P-P}$ |
| Capacitive Load Start                     |  | 2   |            |     | Farad                    |
| Capacitive Load Switched                  | Recovers from a 68,000 $\mu$ F switched load in less than 75 ms. |     |            |     |                          |
| Efficiency at 50% load                    | $\eta$   |     | 94         |     | %                        |

OmniOn Power is a trademark of OmniOn Power Inc. All other trademarks belong to their respective owners.

# NE070DC29A Technical Specifications (continued)

## Characteristic Curves

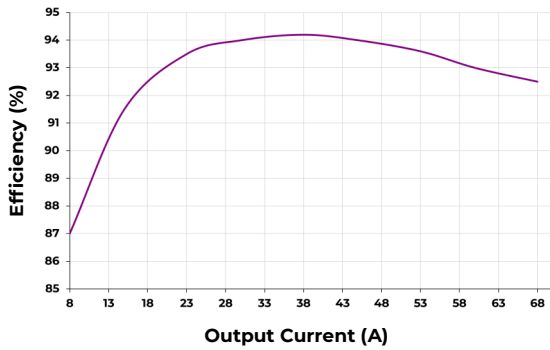


Figure 1. NE070DC29A Efficiency

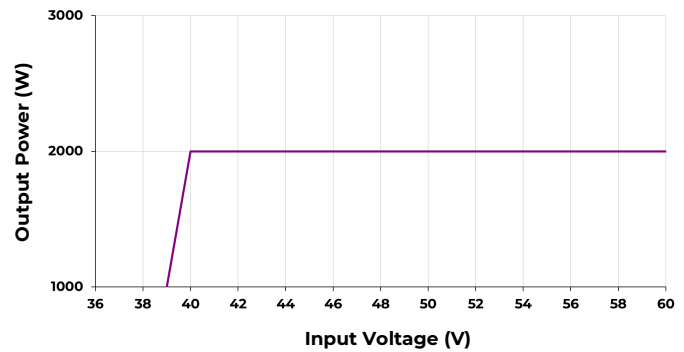


Figure 2. Power Derating Curve

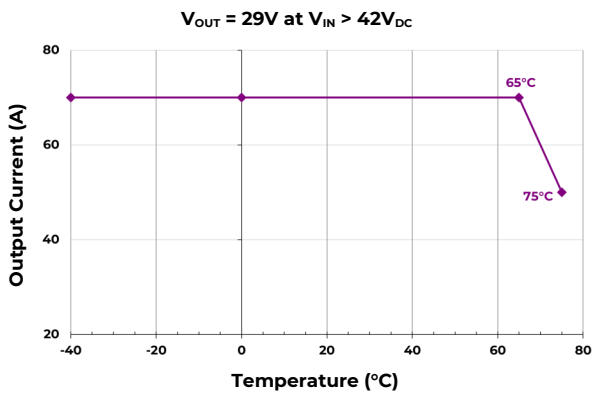


Figure 3. Rated Output Current

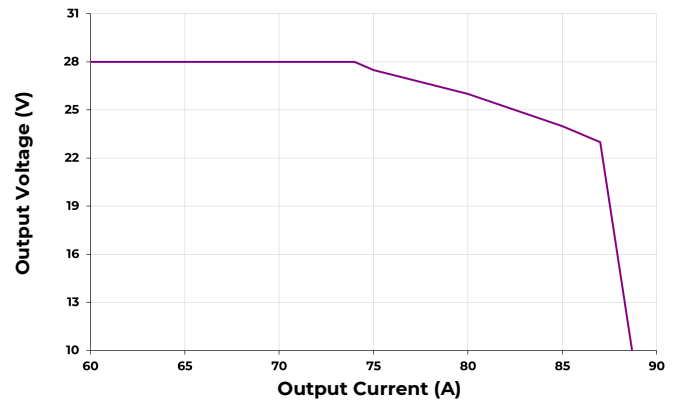


Figure 4. Current Limit Profile

## Environmental, Compliance & Physical

|  |   |
|--|---|
| <b>Operating Ambient Temperature Range</b>             | -40°C to +75°C (Output derates at 2%/°C beginning at 55°C)                |
| <b>Cooling Method</b>                                  | Front to back airflow with onboard temperature controlled fans            |
| <b>Operating Relative Humidity</b>                     | 0 - 95% (non-condensing) for use in a controlled environment              |
| <b>Electromagnetic Compatibility</b>                   | FCC Part 15, EN 55032 (CISPR32), EN 55024, Level A, GR-1089               |
| <b>Agency Certifications* planned</b>                  | UL1950, EN62368, CSA*234/950, NEBS GR-1089, GR-63-CORE                    |
| <b>Heat Release</b>                                    | 205 Watts, or 700 BTU/hr at full load of 2080 Watts                       |
| <b>Mean Time Between Failure (MTBF)</b>                | 900k Hours @ 25°C per Telcordia SR-332, Method 1, Case 3                  |
| <b>Height x Width x Depth, Weight, Packaged weight</b> | 1.63x5.23x13.85in (42x133x352mm),<br>5.05 lbs (2.2 kg), 5.95 lbs (2.7 kg) |

# NE070DC29A Technical Specifications (continued)

## Power Unit and Power Unit Shelf Connectors


### Power Unit PWB

|         |         |         |         |       |       |                   |                   |                   |                   |       |       |       |                   |                   |                 |
|---------|---------|---------|---------|-------|-------|-------------------|-------------------|-------------------|-------------------|-------|-------|-------|-------------------|-------------------|-----------------|
| A4      | A3      | A2      | A1      | -48V  | -48V  | RTN <sup>1</sup>  | RTN <sup>1</sup>  | RTN <sup>1</sup>  | RTN <sup>1</sup>  | +24V  | +24V  | +24V  | PE/GND (ACEG)     | L2/N <sup>2</sup> | L1 <sup>2</sup> |
| B4      | B3      | B2      | B1      |       |       | (-48 / +24V)      | (-48 / +24V)      | (-48 / +24V)      | (-48 / +24V)      |       |       |       |                   |                   |                 |
| C4      | C3      | C2      | C1      |       |       |                   |                   |                   |                   |       |       |       |                   |                   |                 |
| D4      | D3      | D2      | D1      |       |       |                   |                   |                   |                   |       |       |       |                   |                   |                 |
|         |         |         |         | P12   | P11   | P10               | P9                | P8                | P7                | P6    | P5    | P4    | P3                | P2                | P1              |
| 4x Pins | 4x Pins | 4x Pins | 4x Pins | Blade | Blade | Blade MFBL (long) | Blade MFBL (long) | Blade MFBL (long) | Blade MFBL (long) | Blade | Blade | Blade | Blade MFBL (long) | Blade             | Blade           |

**Note:** PIN P7-P10 are not internally connected and are to be shorted inside the system/shelf.  
If using an OmniOn Power™ system/shelf this connection is already provided in the backplane.

### Outline Drawing

Shown looking into the rear of the power unit

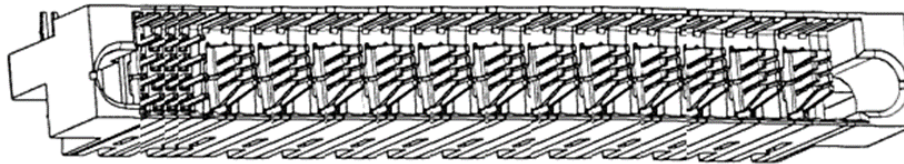


Power Unit Connector - AMP Multi-Beam XL (FCI # 51939-234LF or Tyco # 1900948-1)

### Signals and Signal Pins

| Pin | Length | Signal              | Description  |
|-----|--------|---------------------|--|
| A1  | Long   | RS-485-             | Non-Inverting RS-485 signal line (RS-485 A)  |
| B1  | Long   | RS-485+             | Inverting RS-485 signal line (RS-485 B)  |
| C1  | Long   | Factory Programming | Reserved for Factory Programming – Open Circuit in the system shelf  |
| D1  | Long   | Return              | <ul style="list-style-type: none"> <li>Signal Return for PSIDn, SIDn, &amp; Interlock</li> <li>Power Units Connect Return to NE Common Return internally</li> <li>Power Units diode isolate the Return signals from each Power Slot</li> </ul> |
| A2  | Long   | PSID0               | Power Slot Address 0   |
| B2  | Long   | PSID1               | Power Slot Address 1   |
| C2  | Long   | PSID2               | Power Slot Address 2   |
| D2  | Long   | SID3                | Shelf Address 3  |
| A3  | Long   | SID4                | Shelf Address 4  |
| B3  | Long   | SID5                | Shelf Address 5  |
| C3  | Long   | SID6                | Shelf Address 6  |
| D3  | Long   | SID7                | Shelf Address 7  |
| A4  | Short  | Interlock           | <ul style="list-style-type: none"> <li>Disables power conversion within a Power Unit when not connected to the Return signal</li> <li>Power Unit Shelves connect Interlock directly to the Return signal at each Power Slot</li> </ul>         |
| B4  | Long   | Factory Programming | Reserved for Factory Programming – Open Circuit in the system shelf  |
| C4  | Long   |                     |  |
| D4  | Long   |                     |  |

# NE070DC29A Mechanical Specifications

## Physical Interface Dimensions

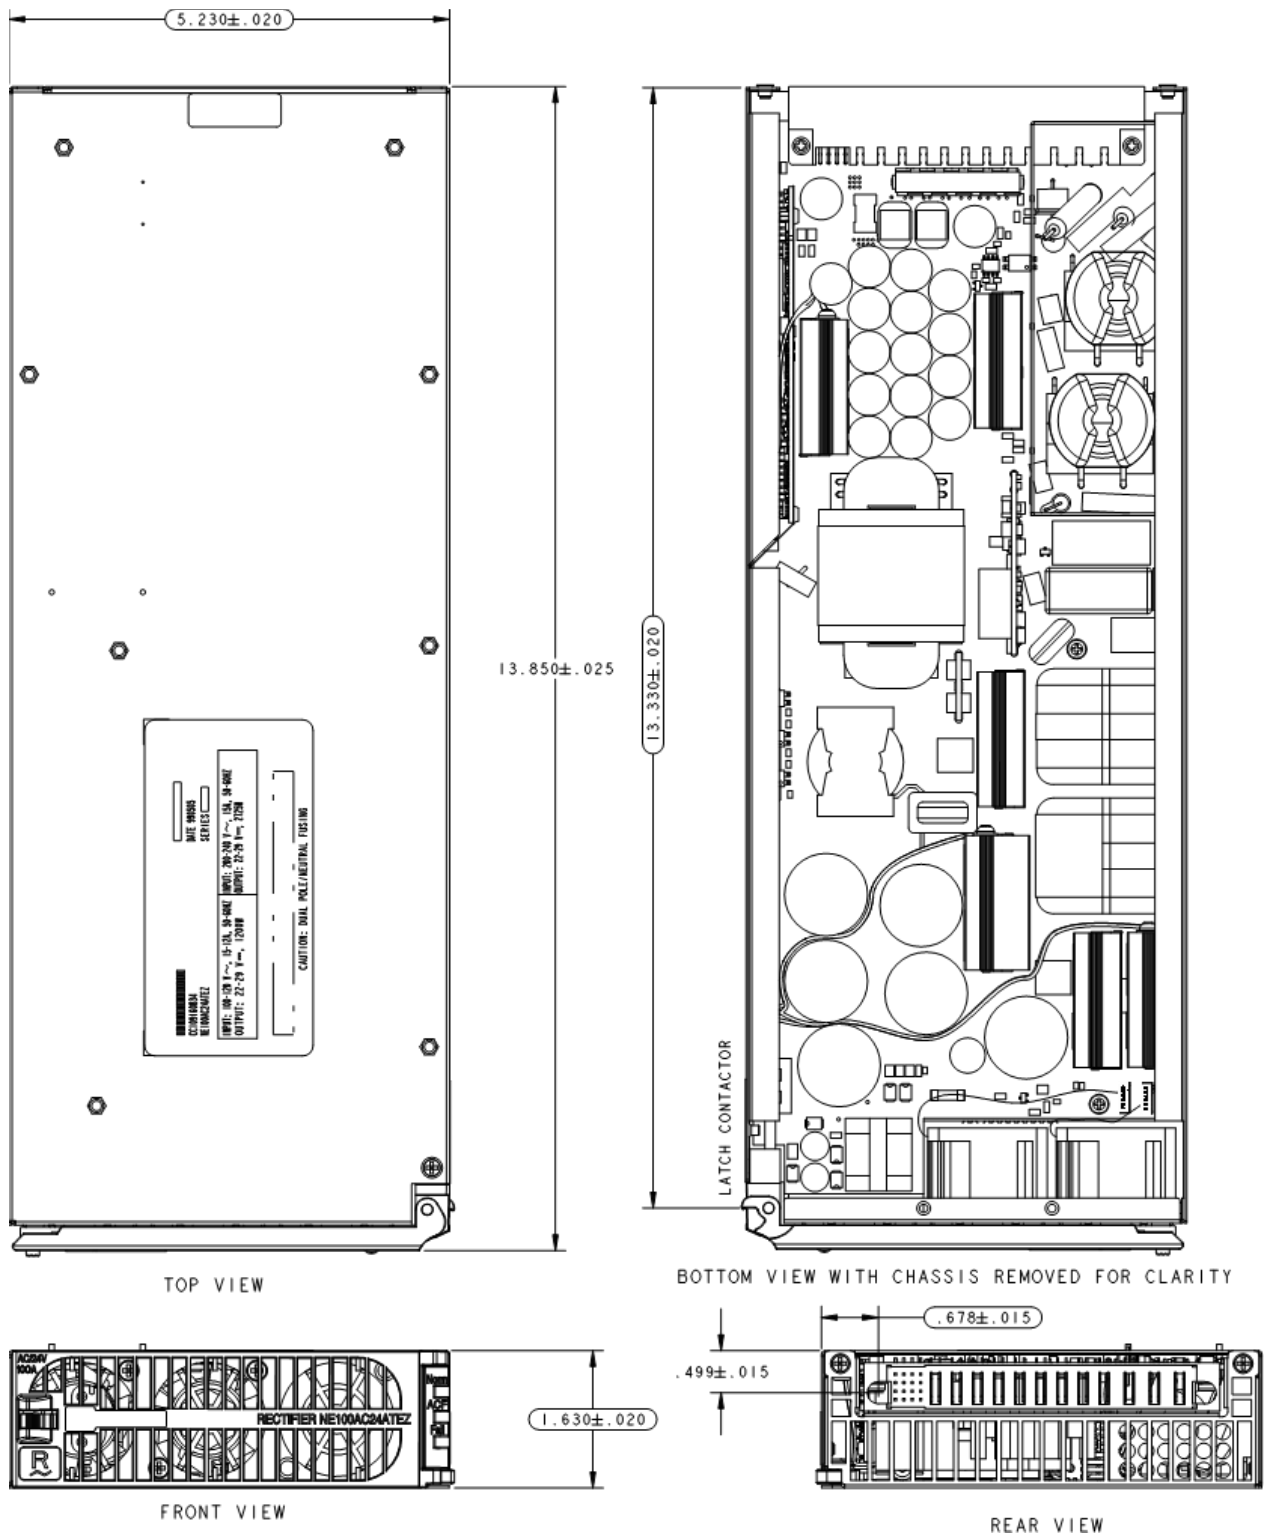

## Change History (excludes grammar & clarifications)

| Revision | Date       | Description of the change |
|----------|------------|---------------------------|
| 1.0      | 12/13/2023 | Initial Release           |

**OmniOn Power Inc.**

601 Shiloh Rd.  
Plano, TX USA

[omnionpower.com](http://omnionpower.com)

We reserve the right to make technical changes or modify the contents of this document without prior notice. OmniOn Power™ does not accept any responsibility for errors or lack of information in this document and makes no warranty with respect to and assumes no liability as a result of any use of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of OmniOn Power™. This document does not convey license to any patent or any intellectual property right. Copyright© 2024 OmniOn Power Inc. All rights reserved.