

DATASHEET

ACE125RUW48

5 Bay / 6 Kilowatt Power Shelf



FEATURES

- Universal Rack for the CAR1248FP and CAR1248TN
- Up to 6,000W (4,800W N+1)
- Fully Hot-Pluggable and Redundant
- Remote Sensing
- LED Indicators
- Built-in Alarm Signals
- Full Protection Features
- World-Wide Safety Approvals

KEY MARKETS & APPLICATIONS

- Base Stations
- Satellite Hubs
- Networking Equipment
- Telecom Access Nodes
- Power for Distributed Power Architectures
- Central Office Switching
- ATE Equipment
- RF Amplifiers


FEATURES	BENEFITS
Single Wire Current Sharing	Provide system stress balancing and increases reliability
Constant Power Option	Better suited for battery charging applications
Constant Current Option	Designed for front-end bulk supply applications
Voltage Trimming Capability	Designed for float VRLA batteries
BControl and Monitoring Signals	Allows for superior system control
Universal Input & International	Reduced logistic costs, meets world-wide standards
Built in Variable Speed Fan	Low noise and increased reliability
LVD and Controller Option	Complete system integration for telecom applications

Technical Specifications

SPECIFICATIONS		6000 Watt Power Shelf for Five CAR1248 Front End & Rectifier Power Supplies	
Rectifier/Front-End Model	CAR1248TN	CAR1248FP	
Maximum Output Power	6000W (4800W N+1 Redundancy) at High Line		
Output Current	112.5A at High Line (92.5A @ low Line)	125A at High Line (104A @ low Line)	
Output Voltage	-54V _{DC} ±0.2V	+48V _{DC} ±0.1V	
Output Voltage Range	-42V _{DC} to -56V _{DC}	+43.2 to +52.8V _{DC}	
Input Voltage*	90-264V _{AC} , 47-63Hz (Individual input feeds)		
Maximum Input Current	12.75A@100V _{AC} , 7.9A@180V _{AC} per module		
Maximum Inrush Current	40A per input (per ETS 300 132-1)		
Power Factor	0.99 typical. Complies with IEC555, EN60555-2, EN61000-3-2		
Efficiency	91% typical at nominal load and 230V _{AC} . (85% at 90V _{AC})		
Regulation - Line	±2% of input power line		
Regulation - Load	±1% of load		
Ripple and Noise	Complies with ETS300 132-2, 32dBnc. Bandwidth: 25Hz - 20kHz. ±1% pk-pk with 0/1uF ceramic and 10uF electrolytic caps at the output.		
Load Sharing	Active single wire load sharing. Unit to share ±10% of full load.		
Transient Response	5% max deviation, 300usec recovery time @ 50% step load and di/dt < 1A/us		
Status Indicators	AC good (GREEN), DC good (GREEN), FAULT (RED)		
Alarm Signals	AC OK, AC High, DC OK, Temperature OK, Module Missing, Current Monitoring, Remote		
Current Limit Protection	Self protected between the range of 110% - 130% of I _{out} nominal		
Overvoltage Protection	59V _{DC} ±1V		
Temperature Range	-10C to 70C (Power derating above 50C at 2%/C). -40C start up.		
Shock & Vibration	IEC 68-2-27, MIL-STD-810E, 20G, Telcordia GR-63-CORE, GR-487-CORE		
EMI/EMC	Class B (FCC and CISPR compliant) - EN55022 Level B. CE Marking Level B. GR-1089-CORE		
Safety Approvals	UL: 487, 1012, 1950 CSA 22.2 No. 650 IEC: 380, 435, 950 VDE 0804, 0806 & CE Marked TUV		
Dimensions	1.74" x 19.00" x 14.98" (44.1mm x 482.6mm x 380.5mm) - including mounting ears		

Technical Specifications (continued)


Outline Drawing

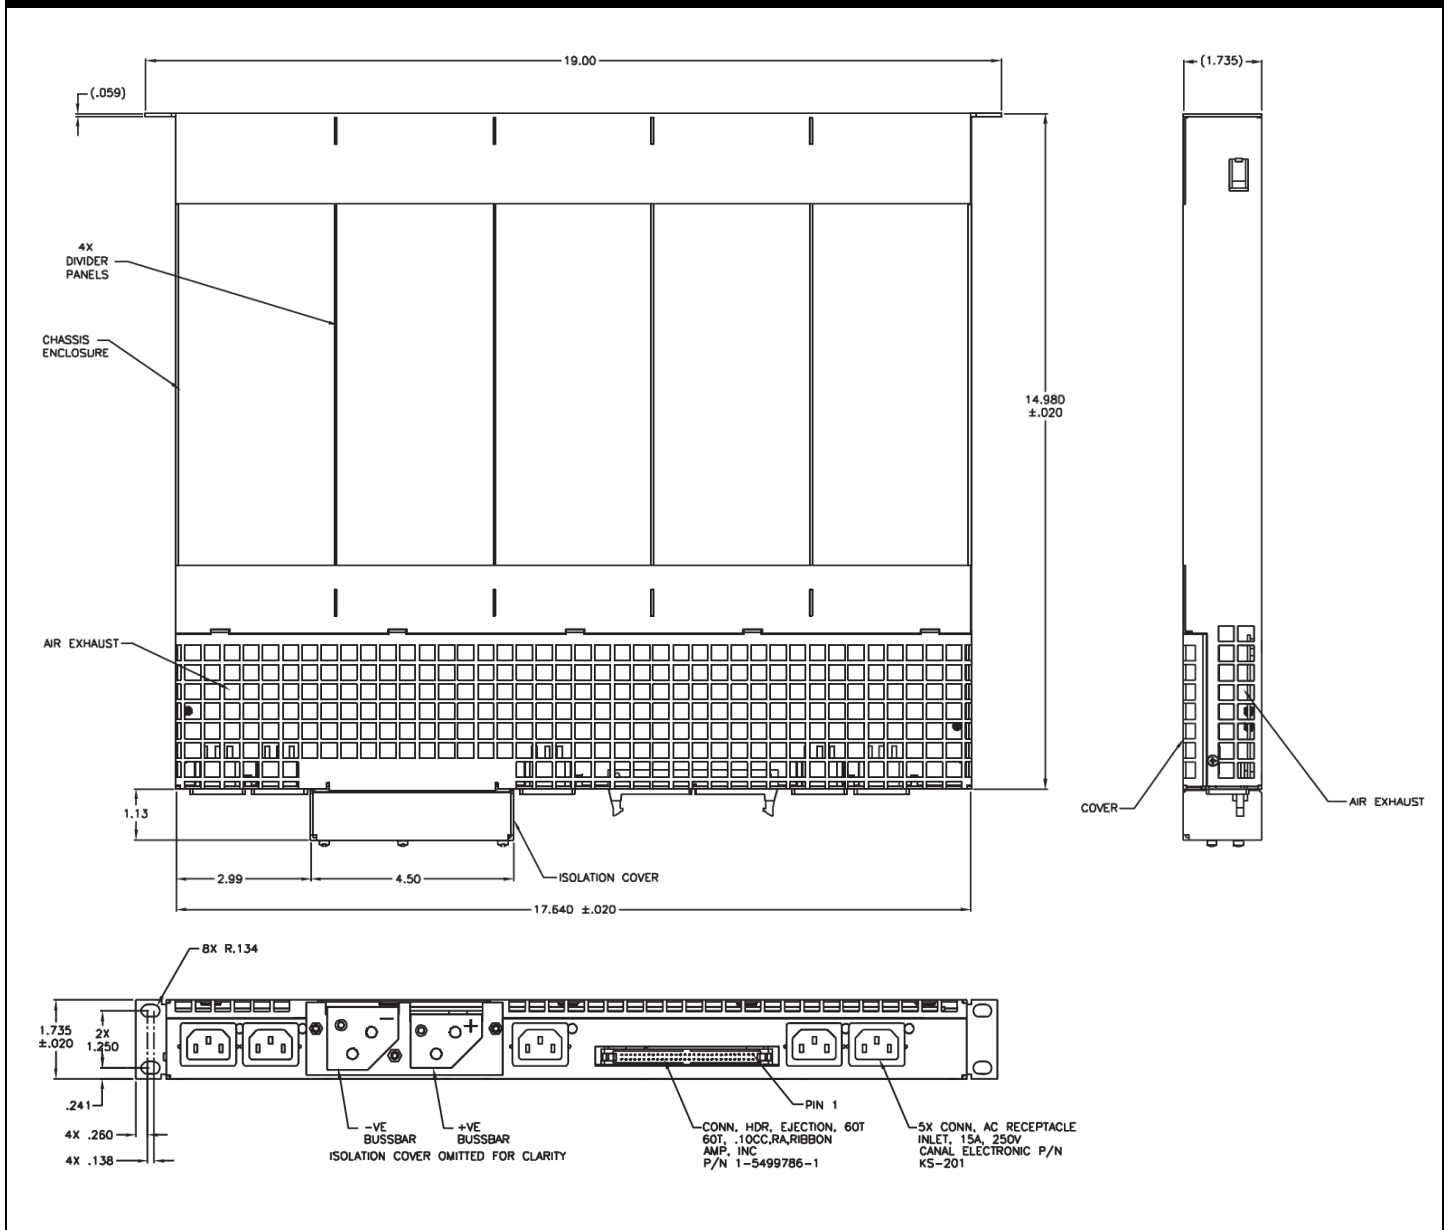

Technical Specifications (continued)

Outline Drawing (continued)

PART NUMBER DEFINITION GUIDE

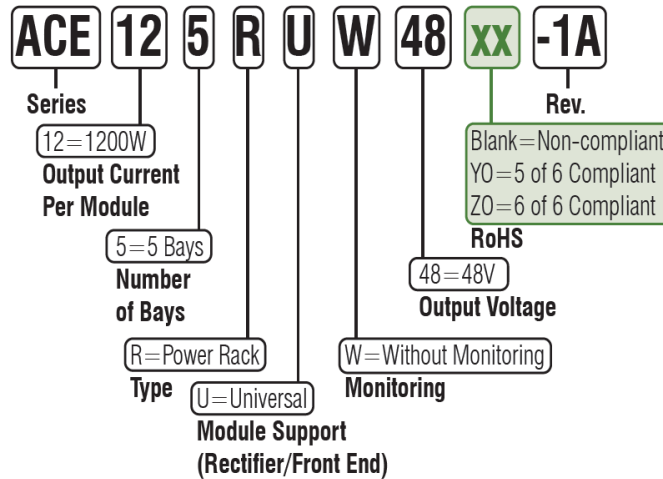

PIN OUT INFORMATION

1	AC OK 1	16	FAULT 2	31	AC HIGH 4	46	SDA
2	DC OK 1	17	AC OK 3	32	FAULT 4	47	WP
3	MODPRES 1	18	DC OK 3	33	AC OK 5	48	RS+_F
4	TEMP OK 1	19	MODPRES 3	34	DC OK 5	49	RS-_F
5	ON/OFF 1	20	TEMP OK 3	35	MODPRES 5	50	Signal RTN
6	I MON 1	21	ON/OFF 3	36	TEMP OK 5	51	NU
7	AC HIGH 1	22	I MON 3	37	ON/OFF 5	52	5SVB_F
8	FAULT 1	23	AC HIGH 3	38	I MON 5	53	5SVB_F
9	AC OK 2	24	FAULT 3	39	AC HIGH 5	54	5SVB_F
10	DC OK 2	25	AC OK 4	40	FAULT 5	55	5SVB_F
11	MODPRES 2	26	DC OK 4	41	NU	56	NU
12	TEMP OK 2	27	MODPRES 4	42	I_SHARE	57	5SVB_RTN_F
13	ON/OFF 2	28	TEMP OK 4	43	VPROG	58	5SVB_RTN_F
14	I MON 2	29	ON/OFF 4	44	INT	59	5SVB_RTN_F
15	AC HIGH 2	30	I MON 4	45	SCL	60	5SVB_RTN_F

Contact Us

For more information, call us at

+1-877-546-3243 (US)

+1-972-244-9288 (Int'l)

Change History (excludes grammar & clarifications)

Revision	Date	Description of the change
1.2	12/22/2021	Updated as per template
1.3	10/31/2023	Updated as per OmniOn template

OmniOn Power Inc.

601 Shiloh Rd.
Plano, TX USA

omnionpower.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. OmniOn Power does not accept any responsibility for errors or lack of information in this document and makes no warranty with respect to and assumes no liability as a result of any use of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of OmniOn Power. This document does not convey license to any patent or any intellectual property right. Copyright© 2023 OmniOn Power Inc. All rights reserved.